

MIMOSA

Version
Wall - 60 cm - walnut white -
600 m3/h

Collection
Classic

EAN code
8034122477770

FEATURES	TECHNICAL FEATURES	PACKAGING:WEIGHTS AND VOLUMES	CONSUMPTION AND CONNECTION FEATURES
Slider LED lighting Metallic grease filter, removable and washable Charcoal filter included	Installation type Wall Dimensions 60 cm Finishing Painted white geffered steel Motor 600 m³/h Type of control Slider Lighting Led 2x2 W (2700 K) Charcoal filter Round charcoal filter Ø212 mm - Type 2 (included) Minimum distance Gas hob: 60 cm Electric hob: 52 cm	Gross weight 18 kg Net weight 15 kg Volumes 0.28 m³ Packaging size Length 710 mm Height 660 mm Depth 595 mm	Maximum consumption 230 W Voltage 220-240V Frequency 50-60Hz ENERGY CLASS C
OPTIONAL ACCESSORIES 103050102 Round charcoal filter Ø212 mm - Type 2			


MIMOSA

Version
Wall - 60 cm - walnut white -
600 m3/h

Collection
Classic

EAN code
8034122477770

ENERGY LABEL

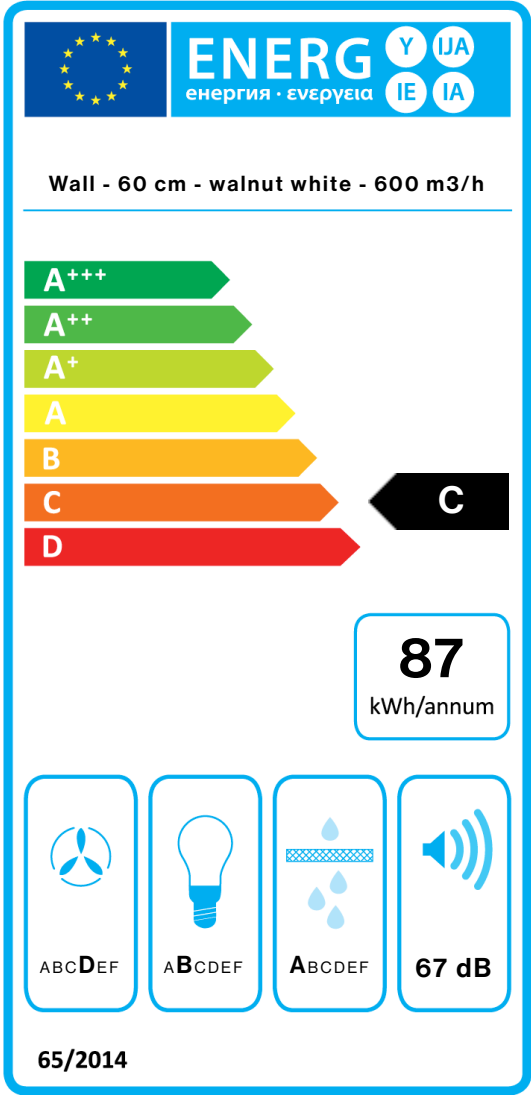

PF		
S	Falmec Spa	
M	Wall - 60 cm - walnut white - 600 m3/h	
AEC	87,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m³/h
Qmax	480,0	m³/h
Qboost	480,0	m³/h
SPEmin	49	dBa
SPEmax	67	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1.4	
EEL	80,6	
Qbep	303,0	m³/h
Pbep	308	Pa
Qboost	480,0	m³/h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lex
Lwa-SPEmax	67	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.