

LUMINA NRS

Version
Wall 90 cm - Steel - 800 m3/h

Collection
Silence - NRS

EAN code
8034122344898



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- NRS technology for a quieter kitchen
- Touch control + 24 h function
- White neon ambient light
- Metallic grease filter, removable and washable
- Optional charcoal filter

Availability Carbon.Zeo filter
KACL.961 for hoods produced from 10/22/2020

OPTIONAL ACCESSORIES

- KACL.400**
Silent / Conveyer NRS
- KACL.570#I**
Extension H700 - Wall
- KACL.571#I**
Extension H960 - Wall
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- 101078900**
High performance filter

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
Tempered glass with steel finishing
- Motor**
800 m³/h
- Type of control**
Touch control
- Speed settings**
4
- Lighting**
Neon 1x21 W
- Filter**
2 x Metallic filter "Base" - 274x274 mm
- Charcoal filter**
High performance filter (optional)
- Minimum distance**
Gas hob: 65 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
42 kg
- Net weight**
36 kg
- Volumes**
0.51 m³
- Packaging size**
Length 1035 mm
Height 670 mm
Depth 740 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
320 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
610 m³/h
I.E.C. 61591
- Maximum noise level**
55 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
582 Pa
- Max. motor power**
224 W
- ENERGY CLASS**
B



LUMINA NRS

Version

Wall 90 cm - Steel - 800 m3/h

Collection

Silence - NRS


EAN code

8034122344898

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	55
Capacity (m3/h) I.E.C.61591	190	300	380	610
Maximum pressure (Pa)	490	500	520	582
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

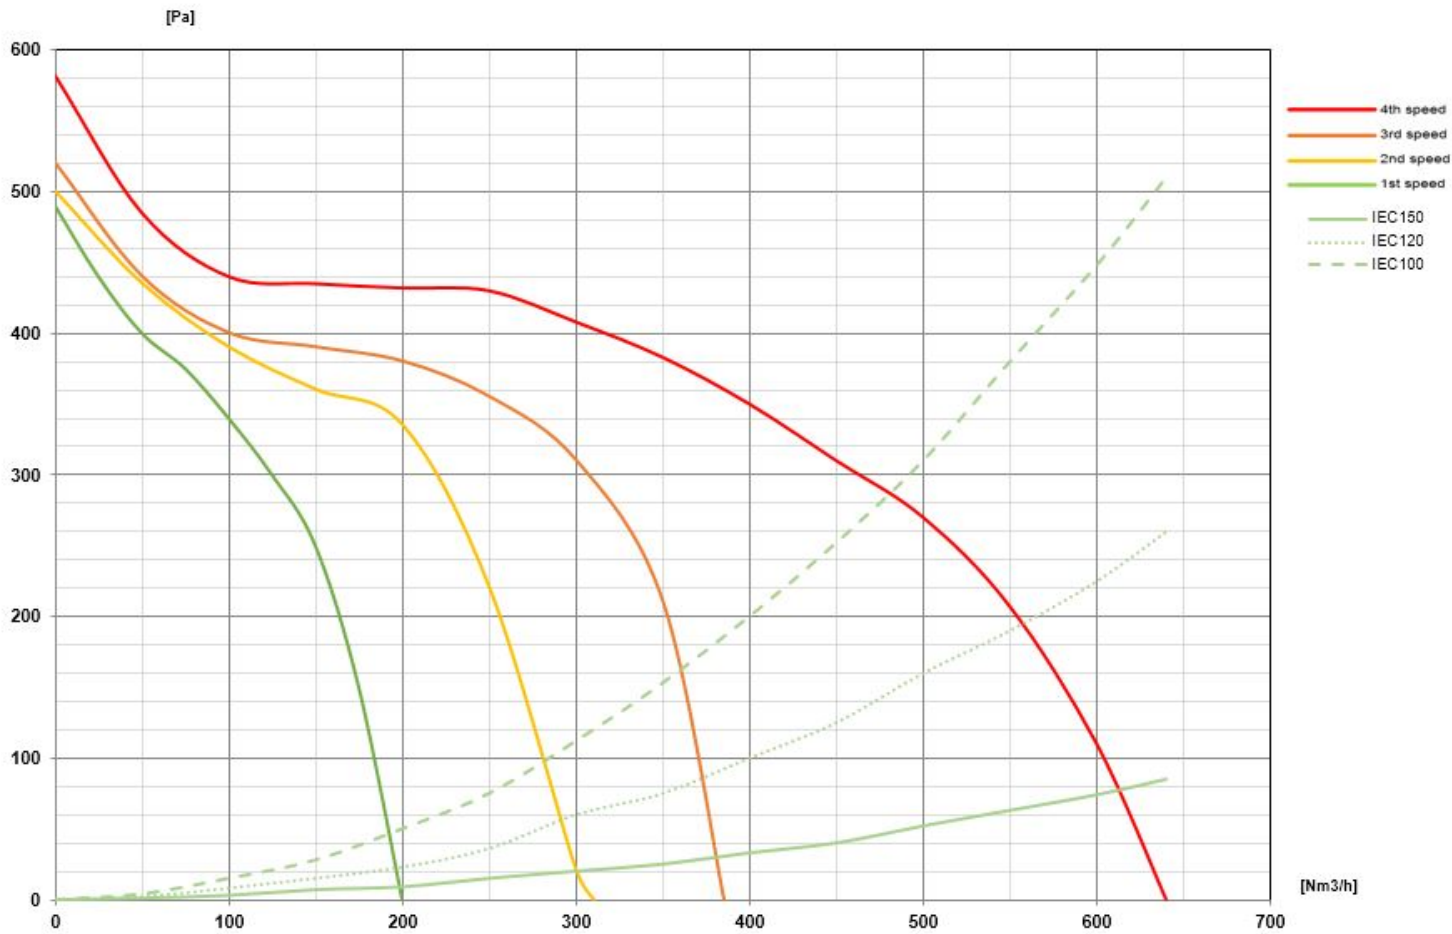


LUMINA NRS

Version
Wall 90 cm - Steel - 800 m3/h

Collection
Silence - NRS

EAN code
8034122344898

ENERGY LABEL

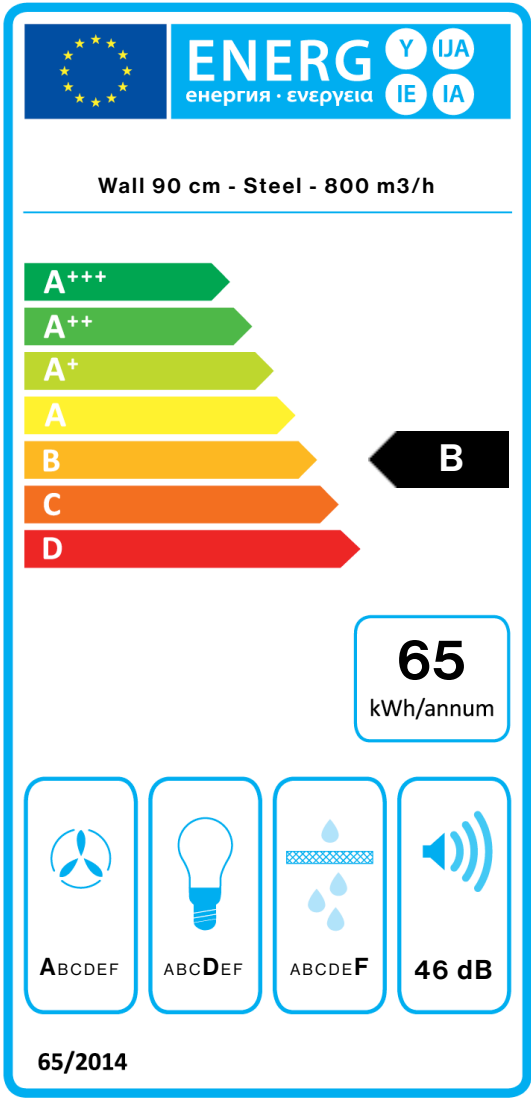

PF		
S	Falmec Spa	
M	Wall 90 cm - Steel - 800 m3/h	
AEC	64,6	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	14,6	
LEC	D	
GFE	53,0	
GFEC	F	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	64,6	
Qbep	369,0	m³/h
Pbep	369	Pa
Qboost	610,0	m³/h
Wbep	131,0	W
WL	23,00	W
Emiddle	336	lex
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.