

FLIPPER NRS

**Version**  
Wall 85 cm - Black - 800 m3/h

**Collection**  
Silence - NRS

**EAN code**  
8034122353739



The photograph is purely for information  
It may not correspond to the selected version.

FEATURES

- NRS technology for a quieter kitchen
- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Optional charcoal filter

OPTIONAL ACCESSORIES

- KACL.400**  
Silent / Conveyor NRS
- KACL.570#I**  
Extension H700 - Wall
- KACL.571#I**  
Extension H960 - Wall
- 101078897**  
High performance filter

TECHNICAL FEATURES

- Installation type**  
Wall
- Dimensions**  
85 cm
- Finishing**  
Black glass satin finishing
- Motor**  
800 m³/h
- Type of control**  
Electronic control
- Speed settings**  
4
- Lighting**  
Led 2x1,2 W - 3200 K
- Filter**  
2 x Metallic filter "Base" - 284x234 mm
- Charcoal filter**  
High performance filter (optional)
- Minimum distance**  
Gas hob: 52 cm  
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**  
43.4 kg
- Net weight**  
36 kg
- Volumes**  
0.5 m³
- Packaging size**  
Length  
1030 mm  
Height  
495 mm  
Depth  
975 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**  
280 W
- Voltage**  
220-240V
- Frequency**  
50-60Hz
- Plug type**  
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**  
610 m³/h  
I.E.C. 61591
- Maximum noise level**  
55 dB(A)re1pW  
I.E.C.60704-2-13
- Maximum pressure (Pa)**  
582 Pa
- Max. motor power**  
224 W
- ENERGY CLASS**  
B



FLIPPER NRS

Version

Wall 85 cm - Black - 800 m3/h

Collection

Silence - NRS


EAN code

8034122353739

MOTOR TECHNICAL SHEET

| Motor speed                                | 1   | 2   | 3   | 4   |
|--------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A)re1pW-I.E.C.60704-2-13 | 37  | 41  | 46  | 55  |
| Capacity (m3/h)<br>I.E.C.61591             | 190 | 300 | 380 | 610 |
| Maximum pressure (Pa)                      | 490 | 500 | 520 | 582 |
| Motor Power (W)                            | 130 | 150 | 178 | 224 |
| Air outlet                                 | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

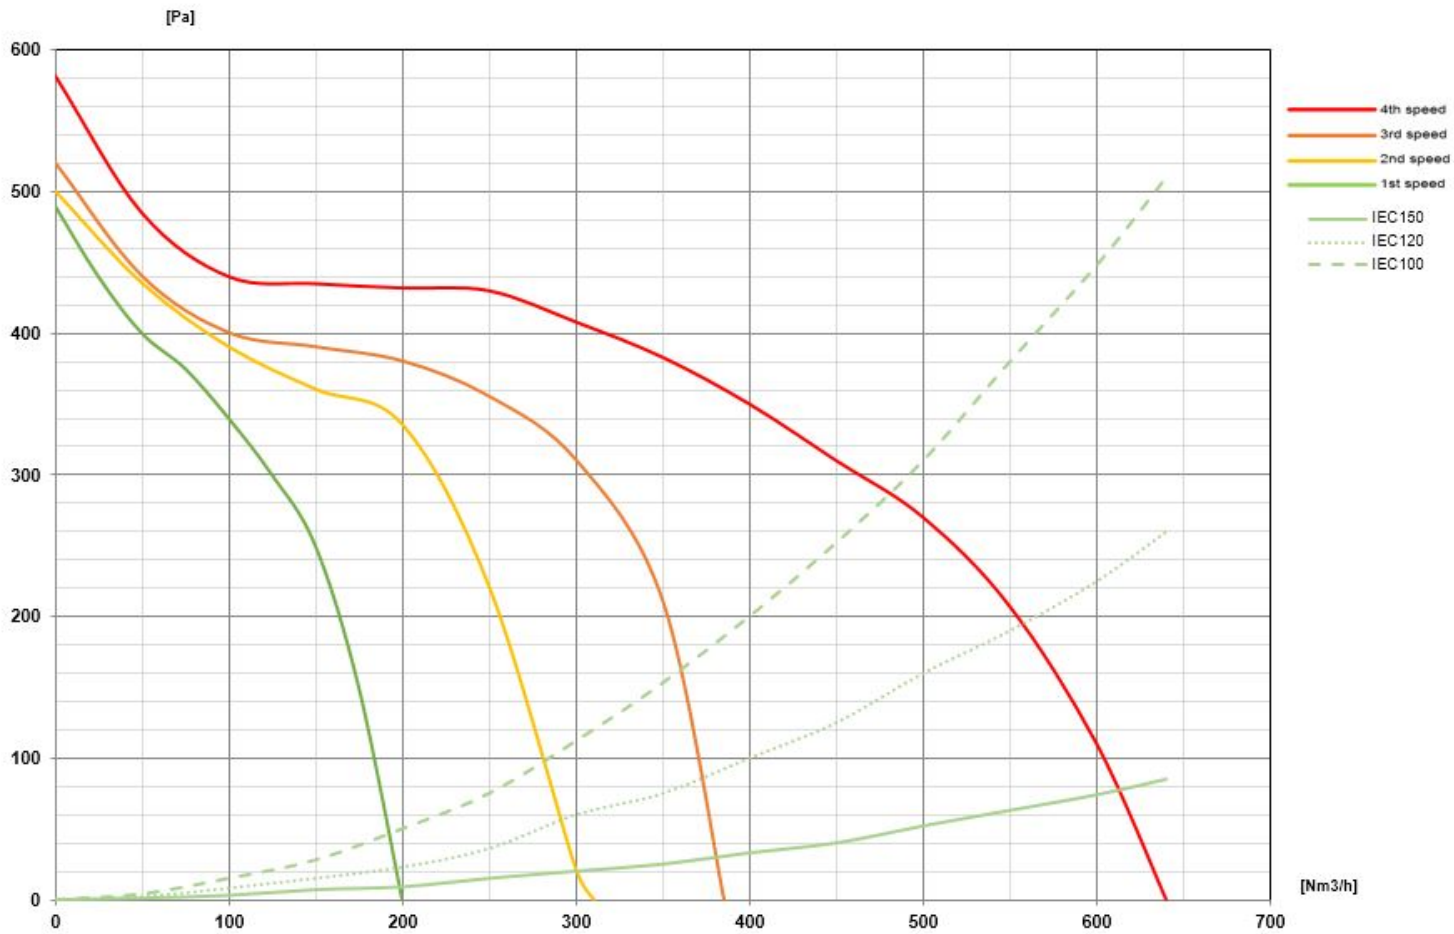


FLIPPER NRS

Version  
Wall 85 cm - Black - 800 m3/h

Collection  
Silence - NRS

EAN code  
8034122353739

ENERGY LABEL

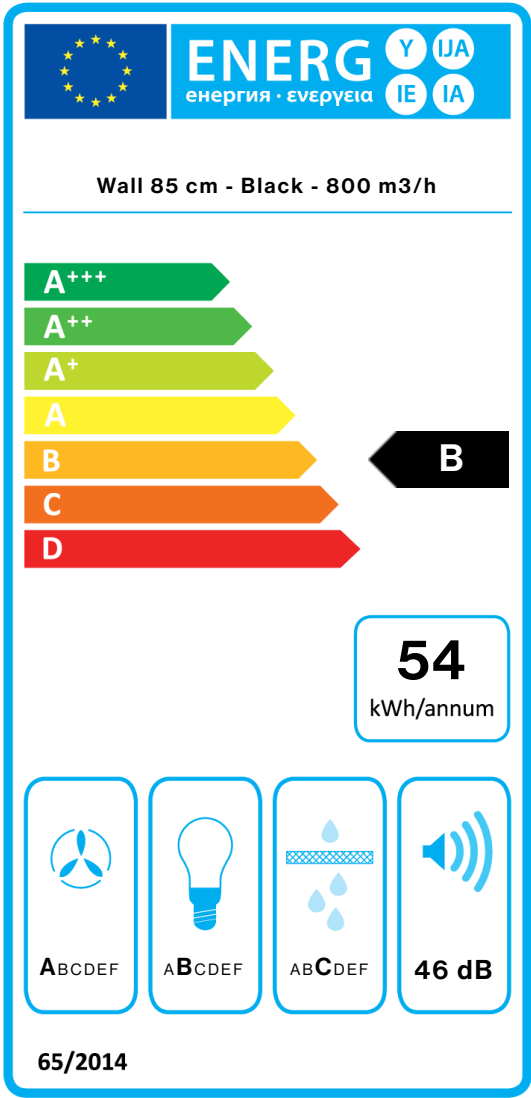

| PF         |                               |       |
|------------|-------------------------------|-------|
| S          | Falmec Spa                    |       |
| M          | Wall 85 cm - Black - 800 m3/h |       |
| AEC        | 53,9                          | kWh/a |
| EEC        | B                             |       |
| FDE        | 28,3                          |       |
| FDEC       | A                             |       |
| LE         | 21,6                          |       |
| LEC        | B                             |       |
| GFE        | 82,0                          |       |
| GFEC       | C                             |       |
| Qmin       | 220,0                         | m³/h  |
| Qmax       | 375,0                         | m³/h  |
| Qboost     | 610,0                         | m³/h  |
| SPEmin     | 37                            | dBa   |
| SPEmax     | 46                            | dBa   |
| SPEboost   | 55                            | dBa   |
| PO         | -                             | W     |
| PS         | 0,48                          | W     |
| PI         |                               |       |
| F          | 1                             |       |
| EEL        | 57,6                          |       |
| Qbep       | 356,0                         | m³/h  |
| Pbep       | 392                           | Pa    |
| Qboost     | 610,0                         | m³/h  |
| Wbep       | 137,0                         | W     |
| WL         | 5,30                          | W     |
| Emiddle    | 114                           | lux   |
| Lwa-SPEmax | 46                            | dBa   |

PF\_Product fiche according to 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). PI\_Additional information according to 66/2014 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.