

MOVE GREEN TECH

Version

Built-in 90 cm - Black - 800 m³/h

Collection

Design

EAN code

8034122101835



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Sliding door

Electronic control

Metallic grease filter, removable and washable

Optional combined regenerable

Carbon.Zeo filter

Optional Chimney

Optional glass shelf

Dynamic LED Light (2700K - 5600K)

Green Tech Motor

Availability Carbon.Zeo filter
KACL.961 for hoods produced
from 05/02/2021

OPTIONAL ACCESSORIES

KACL.107

Glass shelf 90 cm

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000

m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300

m³/h

KACL.798#41F

Remote under-roof motor 950

m³/h

KACL.815

Protective cleaning cloths for
stainless steel (box 10 pcs)

KACL.934

Carbon.Zeo filters

KACL.961

Charcoal and Zeolite filter

KCVJN.00#3

Telescopic chimney h 185 + h 185

KCVJN.01#3

Chimney h 120 mm

103050093

Charcoal Filter Ø192mm

TECHNICAL FEATURES

Installation type

Built-in

Dimensions

90 cm

Finishing

Scotch brite stainless steel (AISI
304)

Lower part in black tempered
glass

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 3x1,2 W - 2700 K / 5600 K

Charcoal filter

Charcoal and Zeolite filter
(optional)

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

20.2 kg

Net weight

16.8 kg

Volumes

0.19 m³

Packaging size

Length

995 mm

Height

410 mm

Depth

465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

150 W

Voltage




220-240V

Frequency

50-60Hz

ENERGY CLASS

A++




MOVE GREEN TECH

Version
Built-in 90 cm - Black - 800 m3/h

Collection
Design

EAN code
8034122101835

ENERGY LABEL

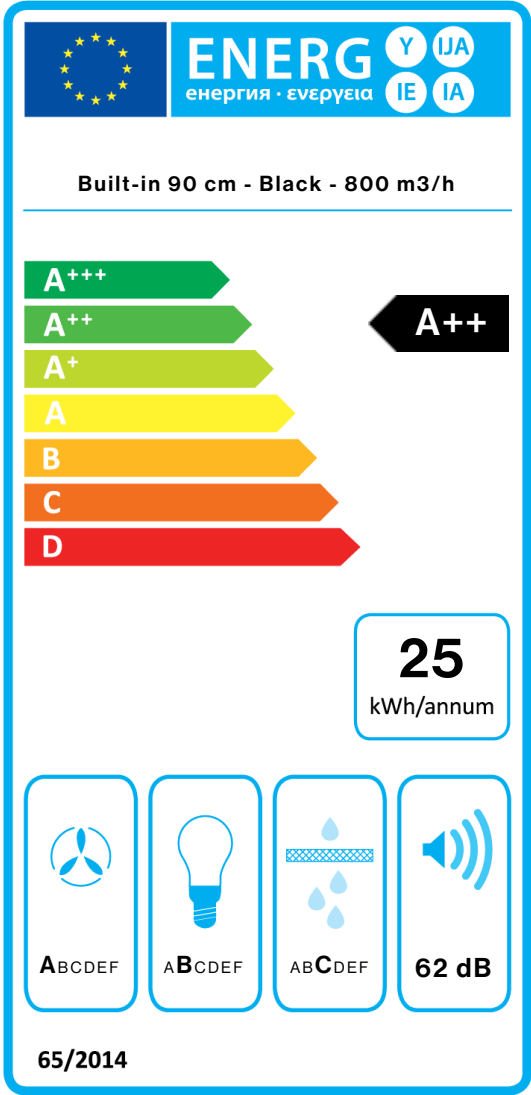

PF		
S	Falmec Spa	
M	Built-in 90 cm - Black - 800 m3/h	
AEC	24,5	kWh/a
EEC	A++	
FDE	37,7	
FDEC	A	
LE	20,7	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	210,0	m³/h
Qmax	510,0	m³/h
Qboost	640,0	m³/h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	0.6	
EEl	35,8	
Qbep	358,0	m³/h
Pbep	341	Pa
Qboost	640,0	m³/h
Wbep	90,0	W
WL	6,50	W
Emiddle	134	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.