

PLANE GREEN TECH

Version

Island 90 cm - 800 m3/h

Collection

Design

EAN code

8034122101781



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Electronic control

LED lighting

Air Falmec filter for balanced suction

Charcoal filter included

Green Tech Motor

OPTIONAL ACCESSORIES

KACL.557#I

Extension H1200 - Island

KACL.770#41F

Remote under-roof 1100 m3/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000 m3/h

KACL.796#4AF

Outdoor extractor fan 1500 m3/h

KACL.797#4AF

Remote under-roof motor 1300 m3/h

KACL.798#41F

Remote under-roof motor 950 m3/h

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.866

Air flow conveyer for re-circulation versions (Island)

103050093

Charcoal Filter Ø192mm

TECHNICAL FEATURES

Installation type

Island

Dimensions

90 cm

Finishing

Scotch brite stainless steel (AISI 304)

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x1,2 W - 3200 K

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

36 kg

Net weight

30 kg

Volumes

0.36 m³

Packaging size

Length

1035 mm

Height

470 mm

Depth

740 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

150 W

Voltage


220-240V

Frequency

50-60Hz

ENERGY CLASS

A+




PLANE GREEN TECH

Version
Island 90 cm - 800 m3/h

Collection
Design

EAN code
8034122101781

ENERGY LABEL

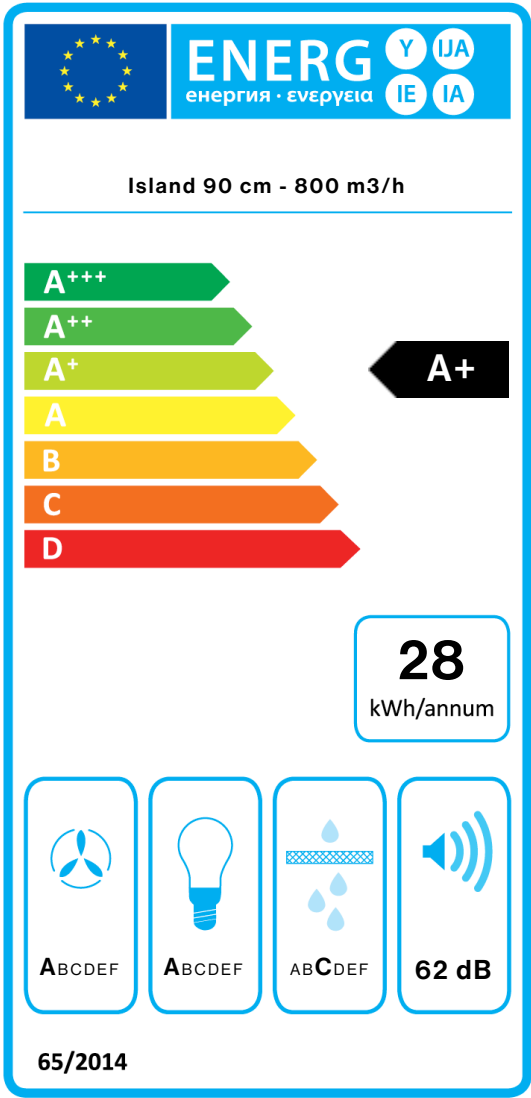

PF		
S	Falmec Spa	
M	Island 90 cm - 800 m3/h	
AEC	27,7	kWh/a
EEC	A+	
FDE	36,3	
FDEC	A	
LE	28,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	210,0	m³/h
Qmax	520,0	m³/h
Qboost	620,0	m³/h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	0.7	
EEL	41,8	
Qbep	327,0	m³/h
Pbep	336	Pa
Qboost	620,0	m³/h
Wbep	84,0	W
WL	5,30	W
Emiddle	245	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.