

PLANE GREEN TECH

Version
Wall 90 cm - 800 m3/h

Collection
Design

EAN code
8034122101798



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Electronic control
- LED lighting
- Air Falmec filter for balanced suction
- Charcoal filter included
- Green Tech Motor

OPTIONAL ACCESSORIES

- KACL.510#I**
Extension H700 - Wall
- KACL.512#I**
Extension H960 - Wall
- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.864**
Air flow conveyor for re-circulation version (Wall)
- 103050093**
Charcoal Filter Ø192mm

TECHNICAL FEATURES


- Installation type**
Wall
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 2x1,2 W - 3200 K

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight**
23 kg
- Net weight**
18 kg
- Volumes**
0.27 m³
- Packaging size**
Length
995 mm
Height
450 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
150 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- ENERGY CLASS**
A+




PLANE GREEN TECH

Version
Wall 90 cm - 800 m3/h

Collection
Design

EAN code
8034122101798

ENERGY LABEL

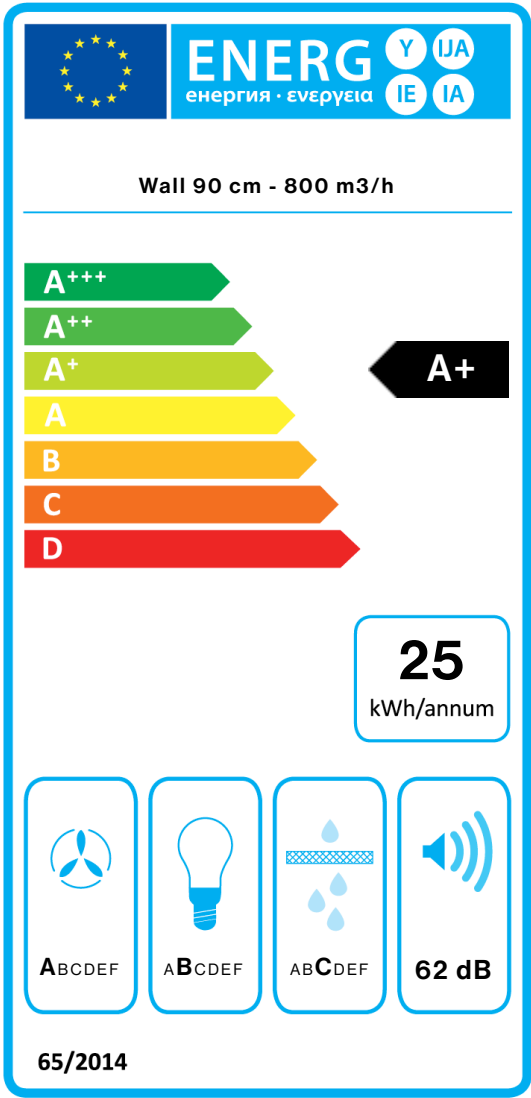

PF		
S	Falmec Spa	
M	Wall 90 cm - 800 m3/h	
AEC	25,3	kWh/a
EEC	A+	
FDE	36,3	
FDEC	A	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	210,0	m³/h
Qmax	520,0	m³/h
Qboost	620,0	m³/h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	0.7	
EEL	39,3	
Qbep	327,0	m³/h
Pbep	336	Pa
Qboost	620,0	m³/h
Wbep	84,0	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.