

## FLIPPER GREEN TECH

### Version

Wall 85 cm - Satin White - 800 m3/h

### Collection

Design

### EAN code

8034122101729



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Electronic control**

**LED lighting**

**Metallic grease filter,  
removable and washable**

**Optional combined regenerative  
Carbon.Zeo filter**

**Charcoal filter included**

**Possible to duct wall mounted  
from rear**

**Optional Chimney**

**White tempered glass with steel  
central band**

**Green Tech Motor**

## OPTIONAL ACCESSORIES

### KACL.770#41F

Remote under-roof 1100 m3/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000  
m3/h

### KACL.796#4AF

Outdoor extractor fan 1500 m3/h

### KACL.797#4AF

Remote under-roof motor 1300  
m3/h

### KACL.798#41F

Remote under-roof motor 950  
m3/h

### KACL.941

External filter unit for sloped  
hoods

### KCQAN.00#I

Chimney (Inox)

### 103050093

Charcoal Filter Ø192mm

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

85 cm

### Finishing

White glass satin finishing

Tempered white glass with

Stainless Steel central band

### Motor

800 m³/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

### Minimum distance

Gas hob: 57 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

30 kg

### Net weight

25 kg

### Volumes

0.27 m³

### Packaging size

Length

950 mm

Height

440 mm

Depth

655 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

150 W

### Voltage



220-240V

### Frequency

50-60Hz

### ENERGY CLASS

A+++

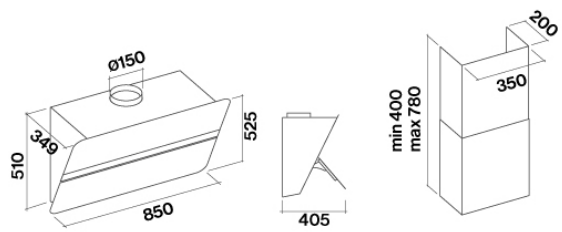


FLIPPER GREEN TECH

**Version**  
Wall 85 cm - Satin White - 800 m3/h

**Collection**  
Design

**EAN code**  
8034122101729

ENERGY LABEL

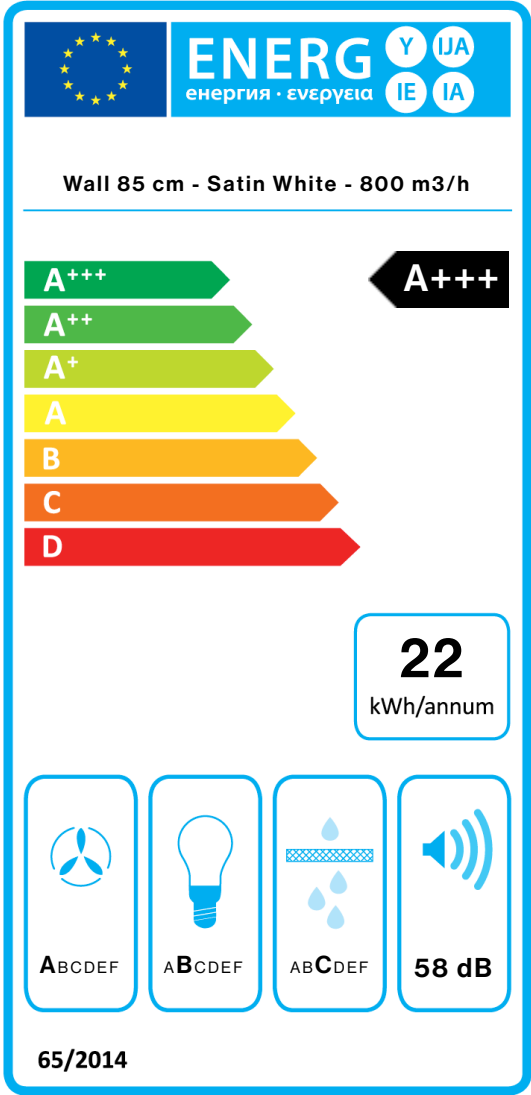

| PF         |                                     |       |
|------------|-------------------------------------|-------|
| S          | Falmec Spa                          |       |
| M          | Wall 85 cm - Satin White - 800 m3/h |       |
| AEC        | 21,8                                | kWh/a |
| EEC        | A+++                                |       |
| FDE        | 41,1                                |       |
| FDEC       | A                                   |       |
| LE         | 23,4                                |       |
| LEC        | B                                   |       |
| GFE        | 82,0                                |       |
| GFEC       | C                                   |       |
| Qmin       | 220,0                               | m³/h  |
| Qmax       | 530,0                               | m³/h  |
| Qboost     | 670,0                               | m³/h  |
| SPEmin     | 45                                  | dBa   |
| SPEmax     | 58                                  | dBa   |
| SPEboost   | 65                                  | dBa   |
| PO         | -                                   | W     |
| PS         | 0,48                                | W     |
| PI         |                                     |       |
| F          | 0.5                                 |       |
| EEL        | 29,9                                |       |
| Qbep       | 412,0                               | m³/h  |
| Pbep       | 359                                 | Pa    |
| Qboost     | 670,0                               | m³/h  |
| Wbep       | 100,0                               | W     |
| WL         | 4,90                                | W     |
| Emiddle    | 114                                 | lex   |
| Lwa-SPEmax | 58                                  | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.