

MOVE

Version
Built-in 60 cm - White - 800 m3/h

Collection
Design

EAN code
8034122352152



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Sliding door
- Electronic control
- Metallic grease filter, removable and washable
- Optional combined regenerative Carbon.Zeo filter
- Optional Chimney
- Optional glass shelf
- Dynamic LED Light (2700K - 5600K)

Control: indication of controls on the frontal panel (The control is in the upper side).

Availability Carbon.Zeo filter KACL.961 for hoods produced from 01/29/2021

OPTIONAL ACCESSORIES

- KACL.106**
Glass shelf 60 cm
- KACL.770#41F**
Remote under-roof 1100 m3/h Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.934**
Carbon.Zeo filters
- KACL.961**
Charcoal and Zeolite filter

TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
60 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Lower part in white tempered glass
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 2x1,2 W - 2700 K / 5600 K
- Filter**
2 x Metallic filter "Base" - 198x161 mm
- Charcoal filter**
Charcoal and Zeolite filter (optional)
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
16 kg
- Net weight**
13.3 kg
- Volumes**
0.13 m³
- Packaging size**
Length 705 mm
Height 410 mm
Depth 465 mm

CONSUMPTION AND CONNECTION FEATURES


- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET


- Maximum capacity**
680 m³/h
I.E.C. 61591
- Maximum noise level**
68 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
215 W
- ENERGY CLASS**
B



Hood



Optional chimney



Optional shelf

MOVE

Version

Built-in 60 cm - White - 800
m³/h

Collection

Design


EAN code

8034122352152

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Capacity (m ³ /h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

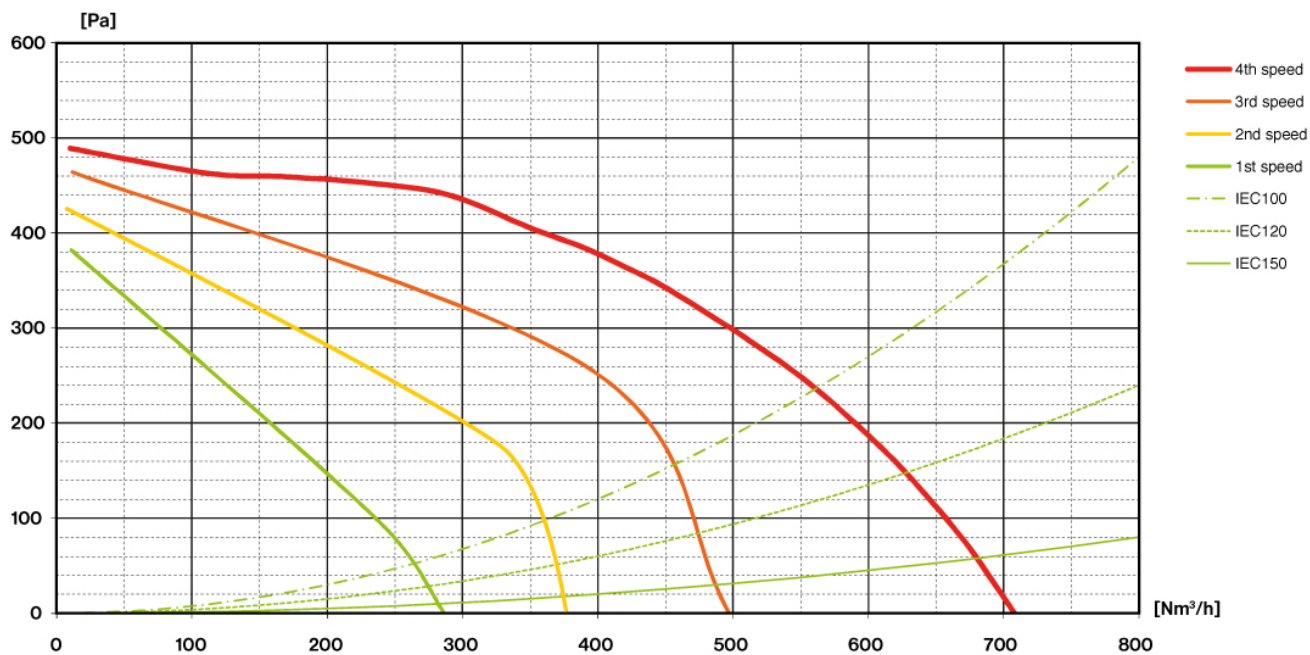


MOVE

Version
Built-in 60 cm - White - 800
m3/h

Collection
Design

EAN code
8034122352152

ENERGY LABEL

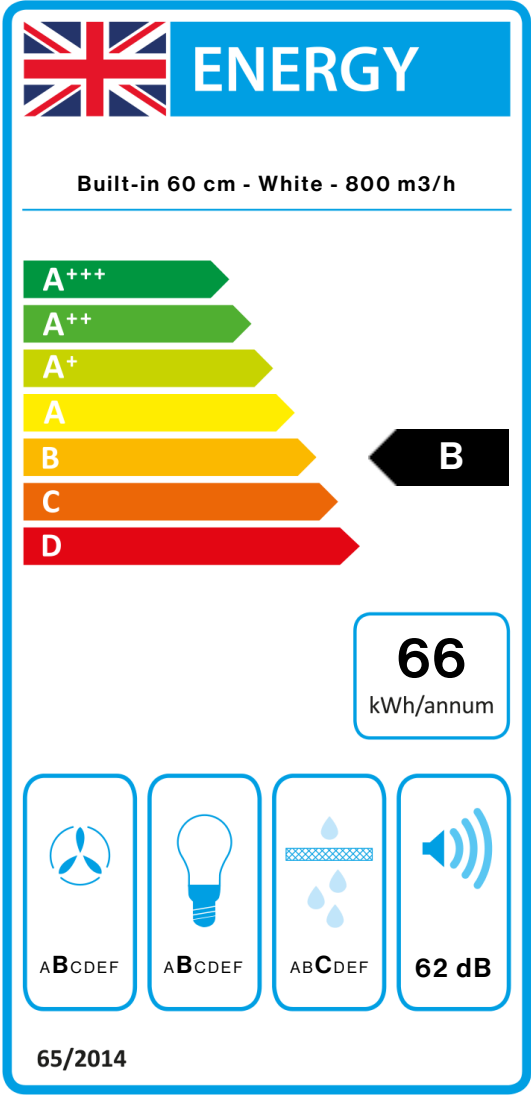

PF		
S	Falmec Spa	
M	Built-in 60 cm - White - 800 m3/h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	270,0	m³/h
Qmax	480,0	m³/h
Qboost	680,0	m³/h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	63,9	
Qbep	382,0	m³/h
Pbep	384	Pa
Qboost	680,0	m³/h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.