

MOVE

Version

Built-in 90 cm - Black - 800 m3/h

Collection

Design

EAN code

8034122352183



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Sliding door

Electronic control

Metallic grease filter, removable and washable

Optional combined regenerable Carbon.Zeo filter

Optional Chimney

Optional glass shelf

Dynamic LED Light (2700K - 5600K)

Control: indication of controls on the frontal panel (The control is in the upper side).

Availability Carbon.Zeo filter KACL.961 for hoods produced from 02/05/2021

OPTIONAL ACCESSORIES

KACL.107

Glass shelf 90 cm

KACL.770#41F

Remote under-roof 1100 m3/h Brushless

KACL.786#41F

Outdoor extractor fan 1000 m3/h

KACL.796#4AF

Outdoor extractor fan 1500 m3/h

KACL.797#4AF

Remote under-roof motor 1300 m3/h

KACL.798#41F

Remote under-roof motor 950 m3/h

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.934

Carbon.Zeo filters

KACL.961

Charcoal and Zeolite filter

KCVJN.00#N

KIT CHIMNEY VIRGOLA-MOVE

H=185 + PROL. H=185

(W/Packaging) BLACK

KCVJN.01#N

TECHNICAL FEATURES

Installation type

Built-in

Dimensions

90 cm

Finishing

Scotch brite stainless steel (AISI 304)

Lower part in black tempered glass

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 3x1,2 W - 2700 K / 5600 K

Filter

3 x Metallic filter "Base" - 198x161 mm

Charcoal filter

Charcoal and Zeolite filter (optional)

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

20.2 kg

Net weight

16.8 kg

Volumes

0.19 m³

Packaging size

Length

995 mm

Height

410 mm

Depth

465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

680 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

500 Pa


Max. motor power

215 W


ENERGY CLASS

B


KIT CHIMNEY VIRGOLA-MOVE
H=120 (W/Packaging) BLACK



Hood



Optional chimney



Optional shelf

MOVE

Version

Built-in 90 cm - Black - 800
m³/h

Collection

Design


EAN code

8034122352183

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Capacity (m ³ /h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

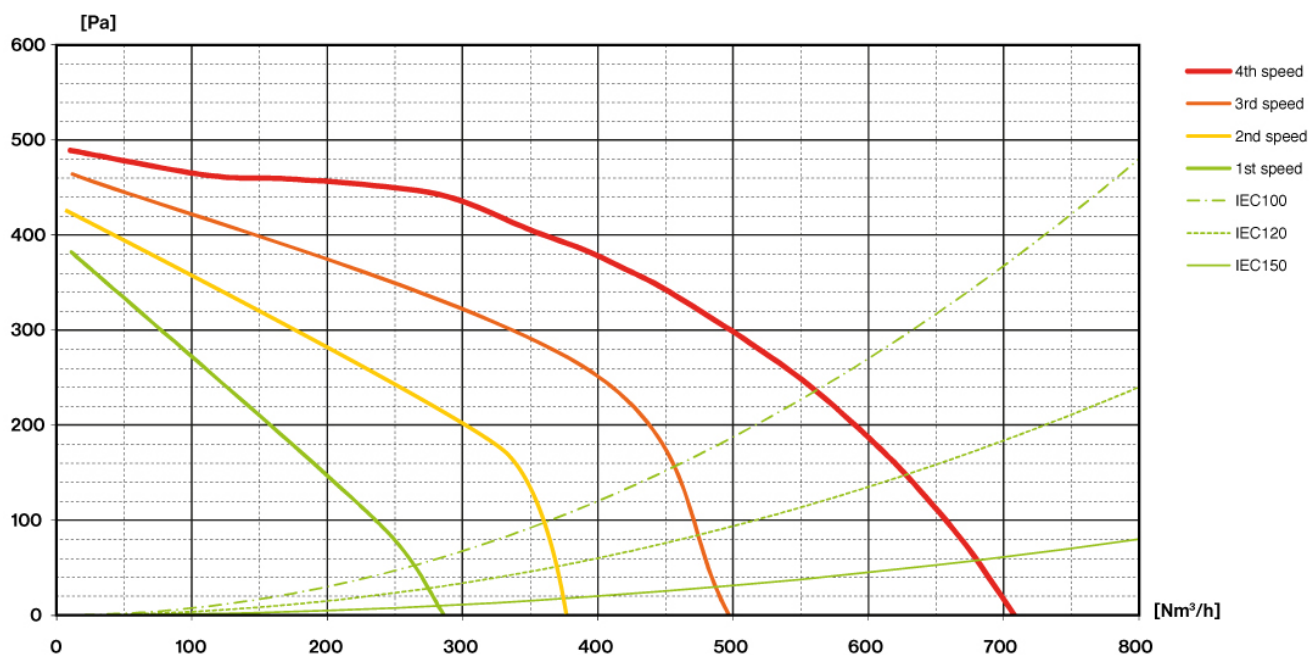


MOVE

Version
Built-in 90 cm - Black - 800 m3/h

Collection
Design

EAN code
8034122352183

ENERGY LABEL

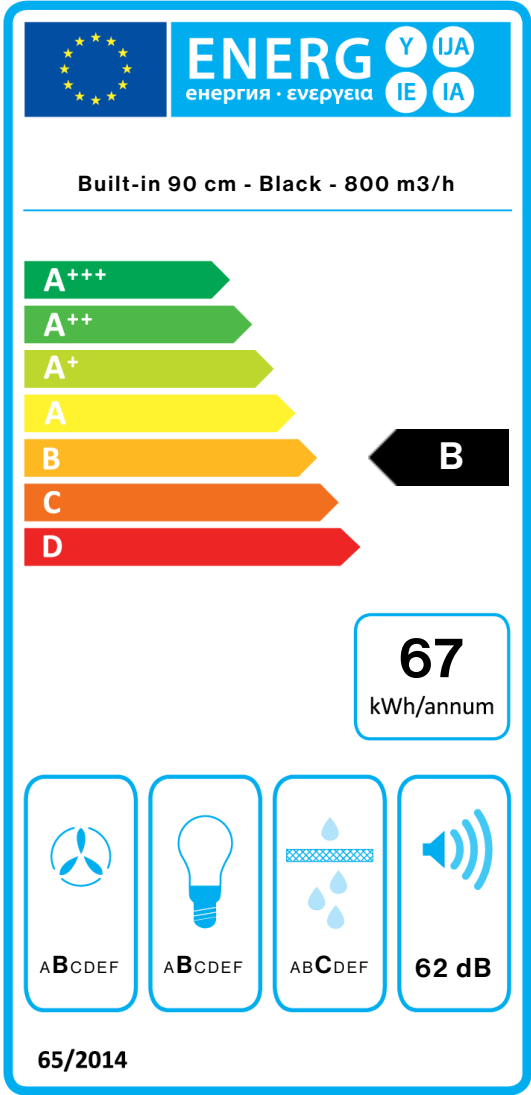

PF		
S	Falmec Spa	
M	Built-in 90 cm - Black - 800 m3/h	
AEC	67,0	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,7	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m³/h
Qmax	480,0	m³/h
Qboost	680,0	m³/h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	64,3	
Qbep	382,0	m³/h
Pbep	384	Pa
Qboost	680,0	m³/h
Wbep	155,1	W
WL	6,50	W
Emiddle	134	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.