

POLAR WHITE

**Version**  
Wall 35 cm - White - 800 m3/h

**Collection**  
White

**EAN code**  
8034122342146



The photograph is purely for information  
It may not correspond to the selected version.

FEATURES

- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Charcoal filter included

OPTIONAL ACCESSORIES

- KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless
- KACL.786#41F**  
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**  
Remote under-roof motor 1300 m3/h
- KACL.798#41F**  
Remote under-roof motor 950 m3/h
- 103050091**  
Round charcoal filter Ø170 mm - Type 6

TECHNICAL FEATURES

- Installation type**  
Wall
- Dimensions**  
35 cm
- Finishing**  
Painted white steel
- Motor**  
800 m³/h
- Type of control**  
Electronic control
- Speed settings**  
4
- Lighting**  
Led 3x1,2 W - 3200 K
- Filter**  
Metallic filter "Base" - 235x245 mm (White)
- Charcoal filter**  
Round charcoal filter Ø170 mm - Type 6 (optional)
- Minimum distance**  
Gas hob: 60 cm  
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**  
20.4 kg
- Net weight**  
16.4 kg
- Volumes**  
0.3 m³
- Packaging size**  
Length  
995 mm  
Height  
500 mm  
Depth  
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**  
280 W
- Voltage**  
220-240V
- Frequency**  
50-60Hz
- Plug type**  
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**  
710 m³/h  
I.E.C. 61591
- Maximum noise level**  
67 dB(A)re1pW  
I.E.C.60704-2-13
- Maximum pressure (Pa)**  
500 Pa
- Max. motor power**  
215 W
- ENERGY CLASS**  
B



POLAR WHITE

Version  
Wall 35 cm - White - 800 m3/h


Collection  
White

EAN code  
8034122342146

MOTOR TECHNICAL SHEET

| Motor speed                                | 1   | 2   | 3   | 4   |
|--------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A)re1pW-I.E.C.60704-2-13 | 48  | 54  | 61  | 67  |
| Capacity (m3/h)<br>I.E.C.61591             | 290 | 380 | 490 | 710 |
| Maximum pressure (Pa)                      | 400 | 450 | 480 | 500 |
| Motor Power (W)                            | 134 | 156 | 180 | 215 |
| Air outlet                                 | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

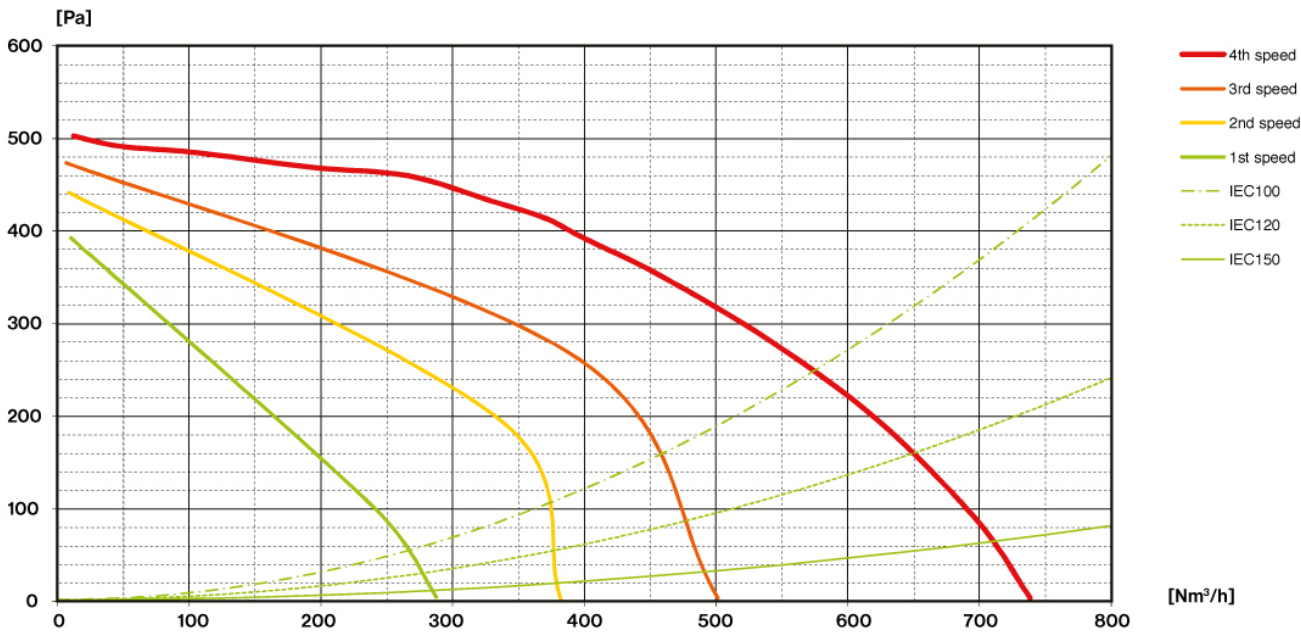


POLAR WHITE

Version  
Wall 35 cm - White - 800 m3/h

Collection  
White

EAN code  
8034122342146

ENERGY LABEL

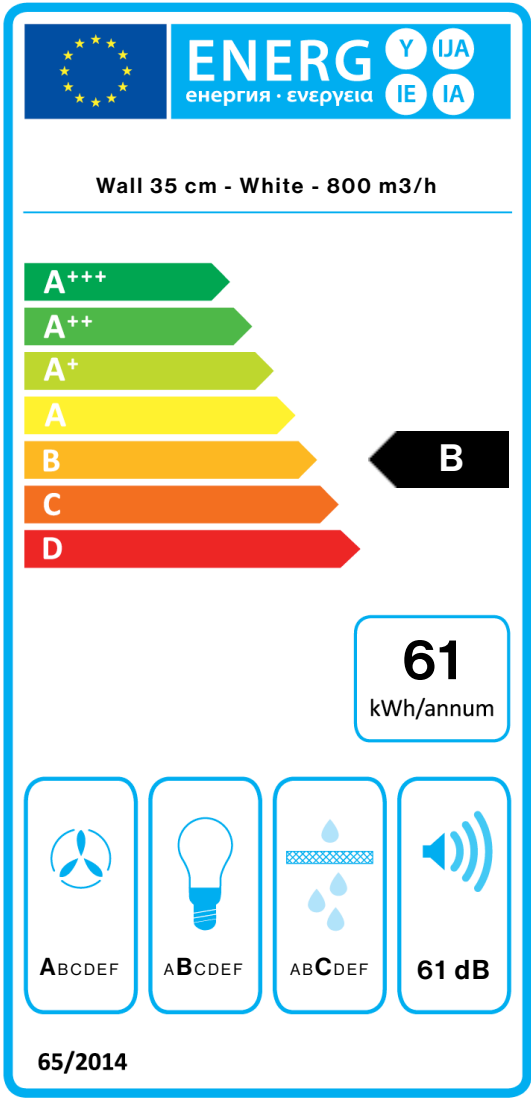

| PF         |                               |       |
|------------|-------------------------------|-------|
| S          | Falmec Spa                    |       |
| M          | Wall 35 cm - White - 800 m3/h |       |
| AEC        | 61,4                          | kWh/a |
| EEC        | B                             |       |
| FDE        | 28,1                          |       |
| FDEC       | A                             |       |
| LE         | 24,2                          |       |
| LEC        | B                             |       |
| GFE        | 76,0                          |       |
| GFEC       | C                             |       |
| Qmin       | 290,0                         | m³/h  |
| Qmax       | 490,0                         | m³/h  |
| Qboost     | 710,0                         | m³/h  |
| SPEmin     | 48                            | dBa   |
| SPEmax     | 61                            | dBa   |
| SPEboost   | 67                            | dBa   |
| PO         | -                             | W     |
| PS         | 0,48                          | W     |
| PI         |                               |       |
| F          | 1                             |       |
| EEL        | 59,6                          |       |
| Qbep       | 371,0                         | m³/h  |
| Pbep       | 412                           | Pa    |
| Qboost     | 710,0                         | m³/h  |
| Wbep       | 151,0                         | W     |
| WL         | 8,60                          | W     |
| Emiddle    | 208                           | lux   |
| Lwa-SPEmax | 61                            | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.