

ZEUS PRO

Version
Wall 90 cm - 950 m3/h

Collection
Professional

EAN code
8034122355313




The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Electronic control
- LED lighting
- Possible to duct wall mounted from rear
- Oil collector
- Professional Baffle Filters
- Scotch brite stainless steel


OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KCQAN.00#I**
Chimney (Inox)



TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
1000 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 3x1,2 W - 3200 K
- Filter**
2 x Metallic filter "Buffle" - 350x350 mm
- Minimum distance**
Gas hob: 63 cm
Electric hob: 52 cm



Rear view

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
29 kg
- Net weight**
25 kg
- Volumes**
0.37 m³
- Packaging size**
Length 995 mm
Height 620 mm
Depth 595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
320 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
860 m³/h
I.E.C. 61591
- Maximum noise level**
69 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
600 Pa
- Max. motor power**
260 W
- ENERGY CLASS**
A



Optional chimney

ZEUS PRO

Version

Wall 90 cm - 950 m³/h

Collection

Professional


EAN code

8034122355313

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	53	58	64	69
Capacity (m ³ /h) I.E.C.61591	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Motor Power (W)	185	215	240	260
Air outlet	150	150	150	150

CAPACITY / PRESSURE

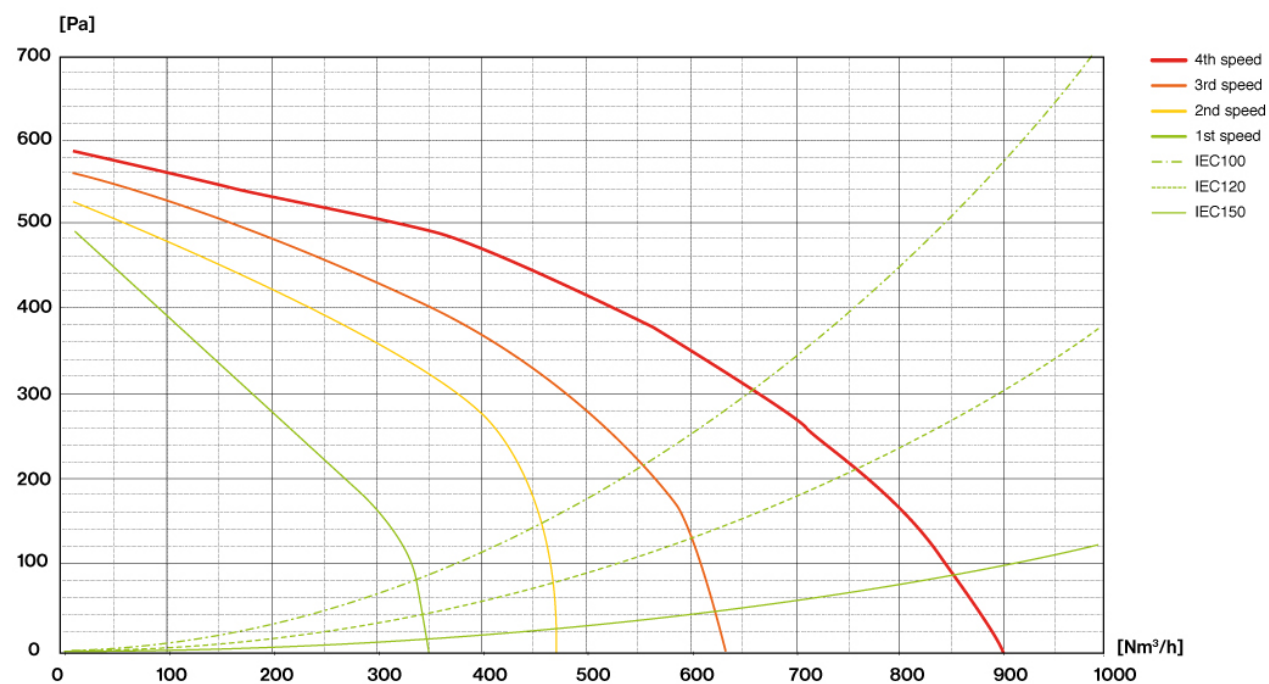


ZEUS PRO

Version
Wall 90 cm - 950 m3/h

Collection
Professional

EAN code
8034122355313

ENERGY LABEL

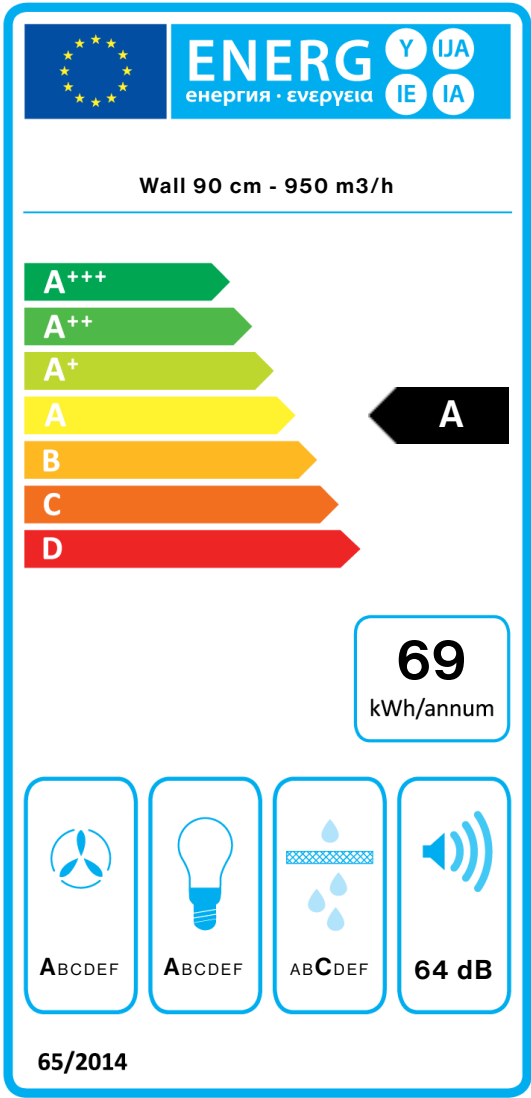

PF		
S	Falmec Spa	
M	Wall 90 cm - 950 m3/h	
AEC	68,8	kWh/a
EEC	A	
FDE	29,3	
FDEC	A	
LE	37,0	
LEC	A	
GFE	74,0	
GFEC	C	
Qmin	350,0	m³/h
Qmax	620,0	m³/h
Qboost	860,0	m³/h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	54,6	
Qbep	473,0	m³/h
Pbep	435	Pa
Qboost	860,0	m³/h
Wbep	195,0	W
WL	6,50	W
Emiddle	157	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.